


e@syDrive® 4320 (IP 00)

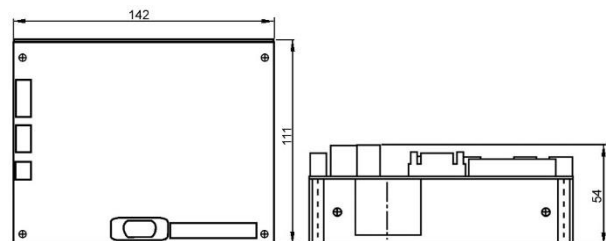

Bestell-Nr. | Part No. 2001 7554

Spannungsversorgung	24 – 80 V DC (10 A)
Ausgangsspannung	25 V AC bei 36 V DC 33 V AC bei 48 V DC 48 V AC bei 70 V DC
Ausgangsstrom	7 A (max. 10 A)
Nennausgangsleistung	300 VA bei 36 V DC 390 VA bei 48 V DC 580 VA bei 70 V DC
Ausgangsfrequenz	2.000 Hz / max. 120.000 min ⁻¹
Modulationsart	SVC, HSPAM/UF
Bremswiderstand (intern)	22 Ohm / 50 W
Umgebungstemperatur	5 - 40 °C
Schutzart	IP 00
Bauform	Schaltschrankeinbau
Gewicht	0,5 kg
Schaltnetzteil	z. B. Schaltnetzteil 2001 3913 (90-264 V AC / 48 V DC / 150 W)
Logikversorgung	18-28 V DC (0,5 A)
Anzeige	7-Segment-Anzeige
Konfiguration	Via Computer-Interface (USB/RS232)
Schnittstellen	3 x Digital-Ausgang – 40 V, 0,5 A (low-side) / 0,1 A (high-side) 2 x Digital-Eingang 1 x Analog-Eingang 1 x CAN 2 x RS232
DC Spindelempfehlung	4015 DC (alle Typen), 4025 DC* (alle Typen)
AC Spindelempfehlung	4025 AC, 4026 AC, 4033 AC* (alle Typen)

*reduzierte Leistung

Änderungen vorbehalten

Input voltage	24 – 80 V DC (10 A)
Output voltage	25 V AC at 36 V DC 33 V AC at 48 V DC 48 V AC at 70 V DC
Output current	7 A (max. 10 A)
Rated output power	300 VA at 36 V DC 390 VA at 48 V DC 580 VA at 70 V DC
Output frequency	2,000 Hz / max. 120,000 rpm
Modulation type	SVC, HSPAM/VF
Brake resistor	22 Ohm / 50 W
Ambient temperature	5 - 40°C
Protection category	IP 00
Design	Cabinet version
Weight	0.5 kg
Switching power supply	E.g. switching power supply 2001 3913 (90-264 V AC / 48 V DC / 150 W)
Logic supply	18-28 V DC (0.5 A)
Display	7 segment display
Configuration	Via computer interface (USB/RS232)
Interfaces	3 x Digital output – 40 V, 0.5 A (low-side) / 0.1 A (high-side) 2 x Digital input 1 x Analogue input 1 x CAN 2 x RS232
DC Spindle reference	4015 DC (all types), 4025 DC* (all types)
AC Spindle reference	4025 AC, 4026 AC, 4033 AC* (all types)

*reduced output power

Subject to change without notice