




Drilling, Milling, Grinding, Engraving
5,000 – 50,000 rpm
max. 850 W (dry running usable)
max. 750 W (with rotary feedthrough,
at 80 bar)

Drehdurchführung	1K-GPD / 32D
Kühlmitteldruck	max. 80 bar
Geforderte Medien- reinheit	ISO 4406: -/17/14
Filterfeinheit	50 µm
Trockenbearbeitung	Drucklos im Dauerbetrieb

Rotary Union	1K-GPD / 32D
Cooling lubricant pressure	max. 80 bar
Required media cleanliness	ISO 4406: -/17/14
Filter fineness	50 µm
Dry machining	Pressureless in continuous operation

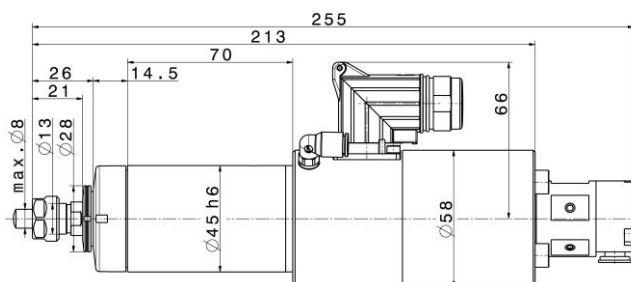

 SycoTec